



ROAD MESH™

TYPE L - Z8/2.4

SPECIFICATIONS		
PROPERTIES		
Type	Double twist hexagonal woven steel wire Road Mesh™ for asphalt pavement reinforcement	 <p>D = 80mm (Nominal)</p>
Mesh Type	8 x 10	
Mesh Wire	2.4 mm diameter (BS EN 10218-2 & BS EN 10223-3)	
Transverse Rod Wire	4.4 mm diameter (BS EN 10218-2)	
Corrosion Protection	Minimum 230 g/m ² Zinc galvanising coated to BS EN 10244-2 Class A.	
Tensile Strength (Longitudinal)	39 kN/m	
Tensile Strength (Transverse)	50 kN/m	
Roll Size / Weight	4m x 50m (Roll weight = 360 kg (Nominal)) 3m x 50m (Roll weight = 270 kg (Nominal))	

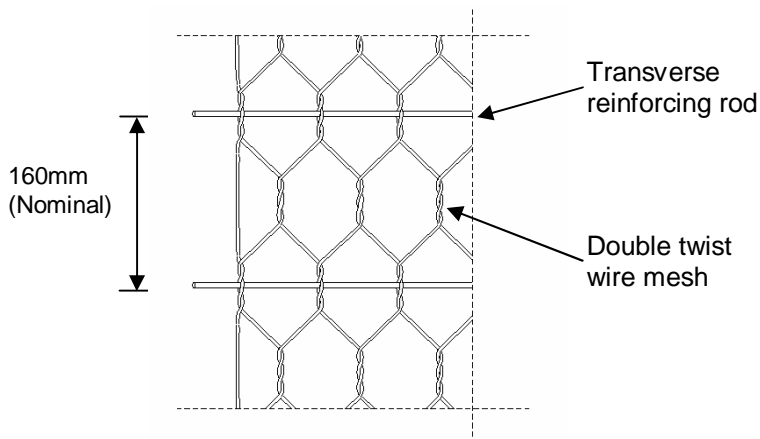

Maccaferri reserves the right to alter specifications of its products without notice.
Please contact us for the most up to date specifications.

Maccaferri Ltd - Head Office
 7600 The Quorum,
 Oxford Business Park, North,
 Garsington Road, Oxford, OX4 2JZ
 Tel: 01865 770555
 Fax: 01865 774550
 Email: oxford@maccaferri.co.uk
 Web: www.maccaferri.co.uk

Area offices
Perth:
 T: 01738 621317 F: 01738 442283 E: perth@maccaferri.co.uk
Belfast:
 T: 028 9026 2830 F: 028 9026 2849 E: belfast@maccaferri.co.uk
Dublin:
 T: 01 885 1662 F: 01 885 1601 E: dublin@maccaferri.ie
 Web: www.maccaferri.ie



Oxford, Perth, Belfast