



ROAD MESH™ TYPE SL - Z8/2.2

SPECIFICATIONS

PROPERTIES

Type	Double twist hexagonal woven steel wire Road Mesh™ for asphalt pavement reinforcement	 <p>D = 80mm (Nominal)</p>
Mesh Type	8 x 10	
Mesh Wire	2.2 mm diameter (BS EN 10218-2 & BS EN 10223-3)	
Transverse Rod Wire	3.9 mm diameter (BS EN 10218-2)	
Corrosion Protection	Minimum 230 g/m ² Zinc galvanising coated to BS EN10244-2 Class A	
Tensile Strength (Longitudinal)	32 kN/m	
Tensile Strength (Transverse)	35 kN/m	
Roll Size / Weight	4m x 50m (Roll weight = 292 kg (Nominal)) 3m x 50m (Roll weight = 219 kg (Nominal))	

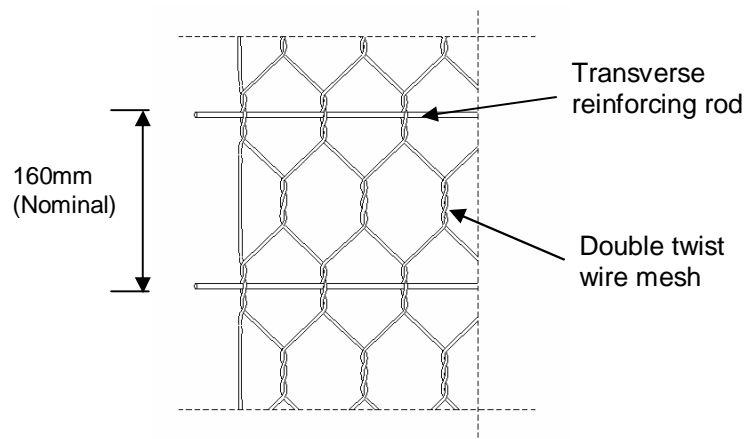

Maccaferri reserves the right to alter specifications of its products without notice.
Please contact us for the most up to date specifications.

Maccaferri Ltd - Head Office
7600 The Quorum,
Oxford Business Park, North,
Garsington Road, Oxford, OX4 2JZ
Tel: 01865 770555
Fax: 01865 774550
Email: oxford@maccaferri.co.uk
Web: www.maccaferri.co.uk

Area offices

Perth:
T: 01738 621317 F: 01738 442283 E: perth@maccaferri.co.uk

Belfast:
T: 028 9026 2830 F: 028 9026 2849 E: belfast@maccaferri.co.uk

Dublin:
T: 01 885 1662 F: 01 885 1601 E: dublin@maccaferri.ie
Web: www.maccaferri.ie



Oxford, Perth, Belfast